




VFD Basic High Voltage Disconnect with fusing Single Phase 240VAC

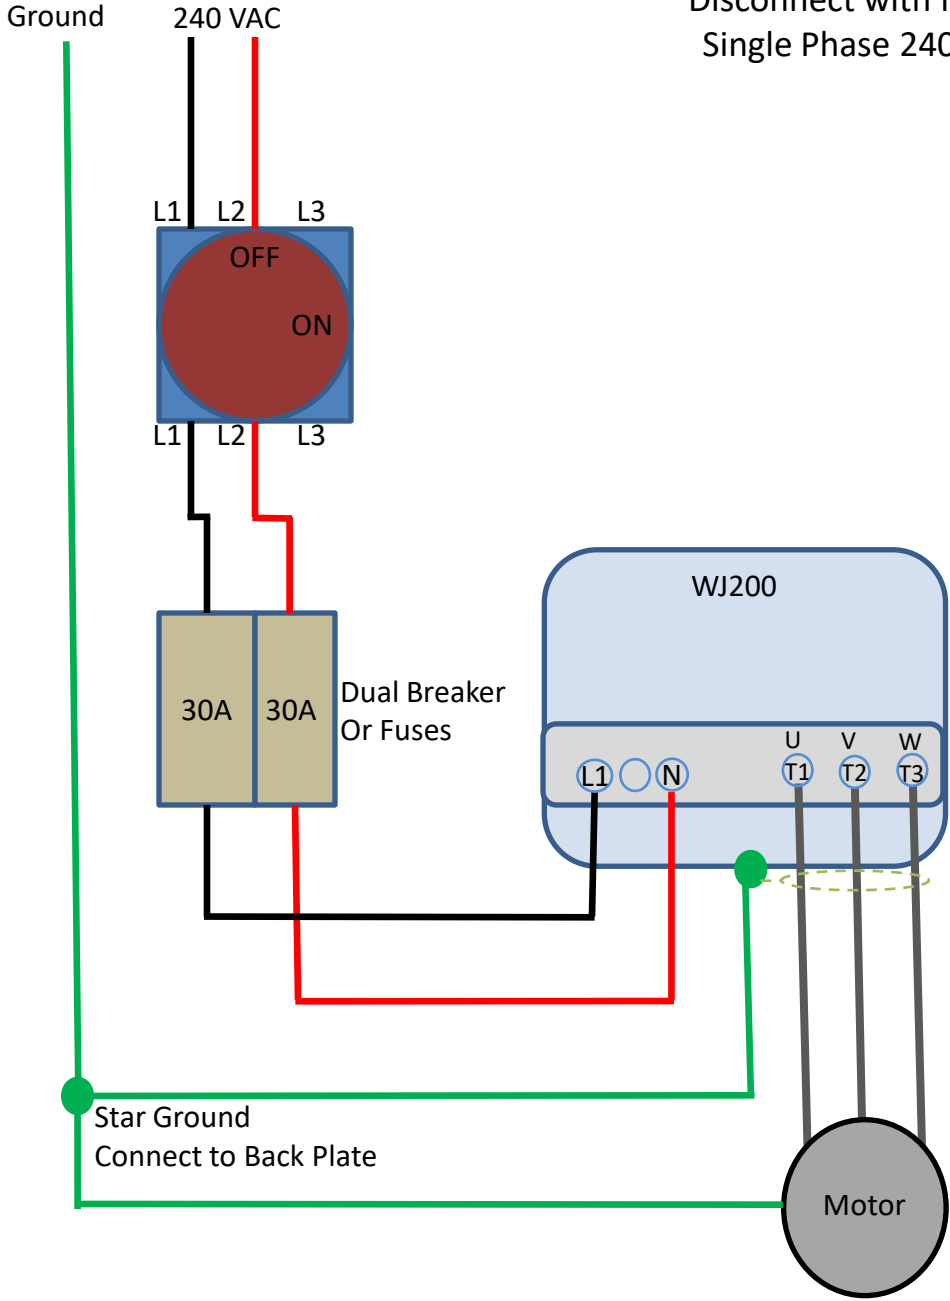


Single-phase 200V 0.75 to 2.2kW

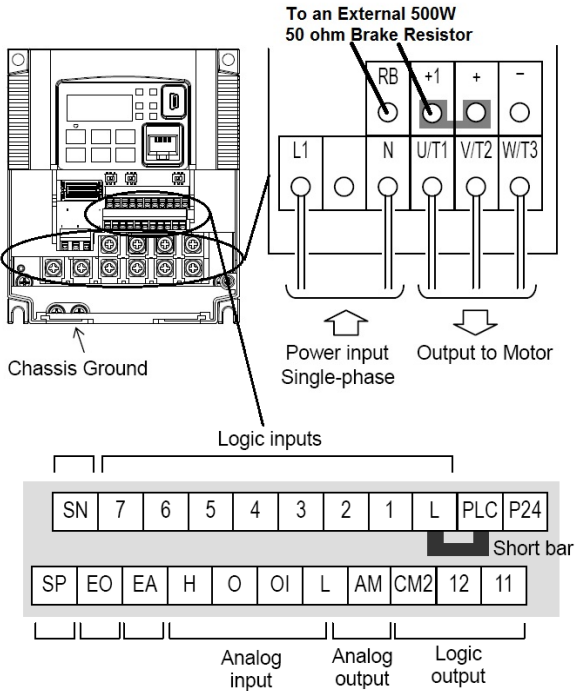


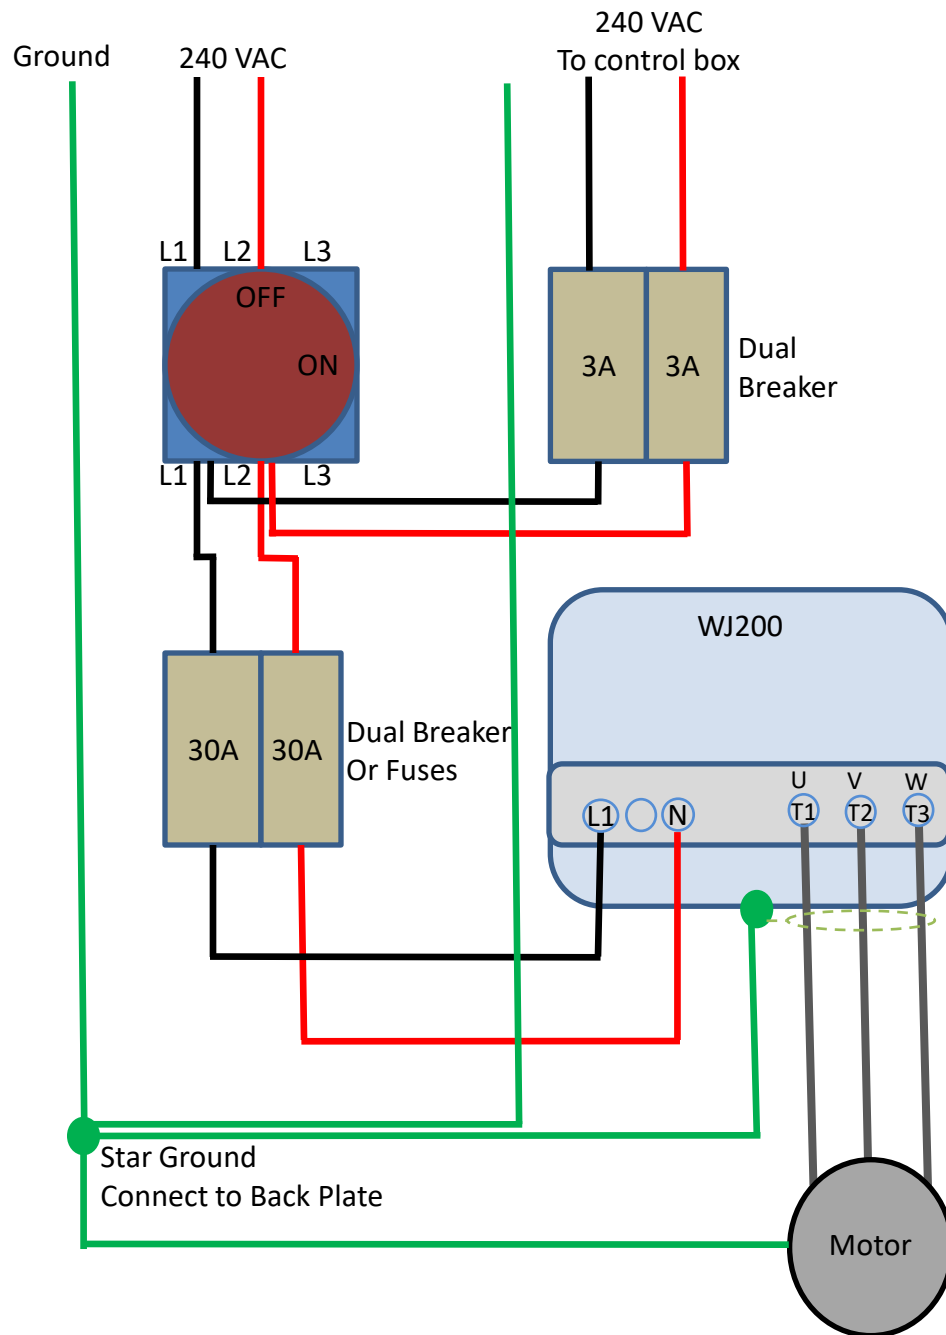

VFD Basic High Voltage
Disconnect with fusing
Control box/coolant 240VAC breaker
Single Phase 240VAC

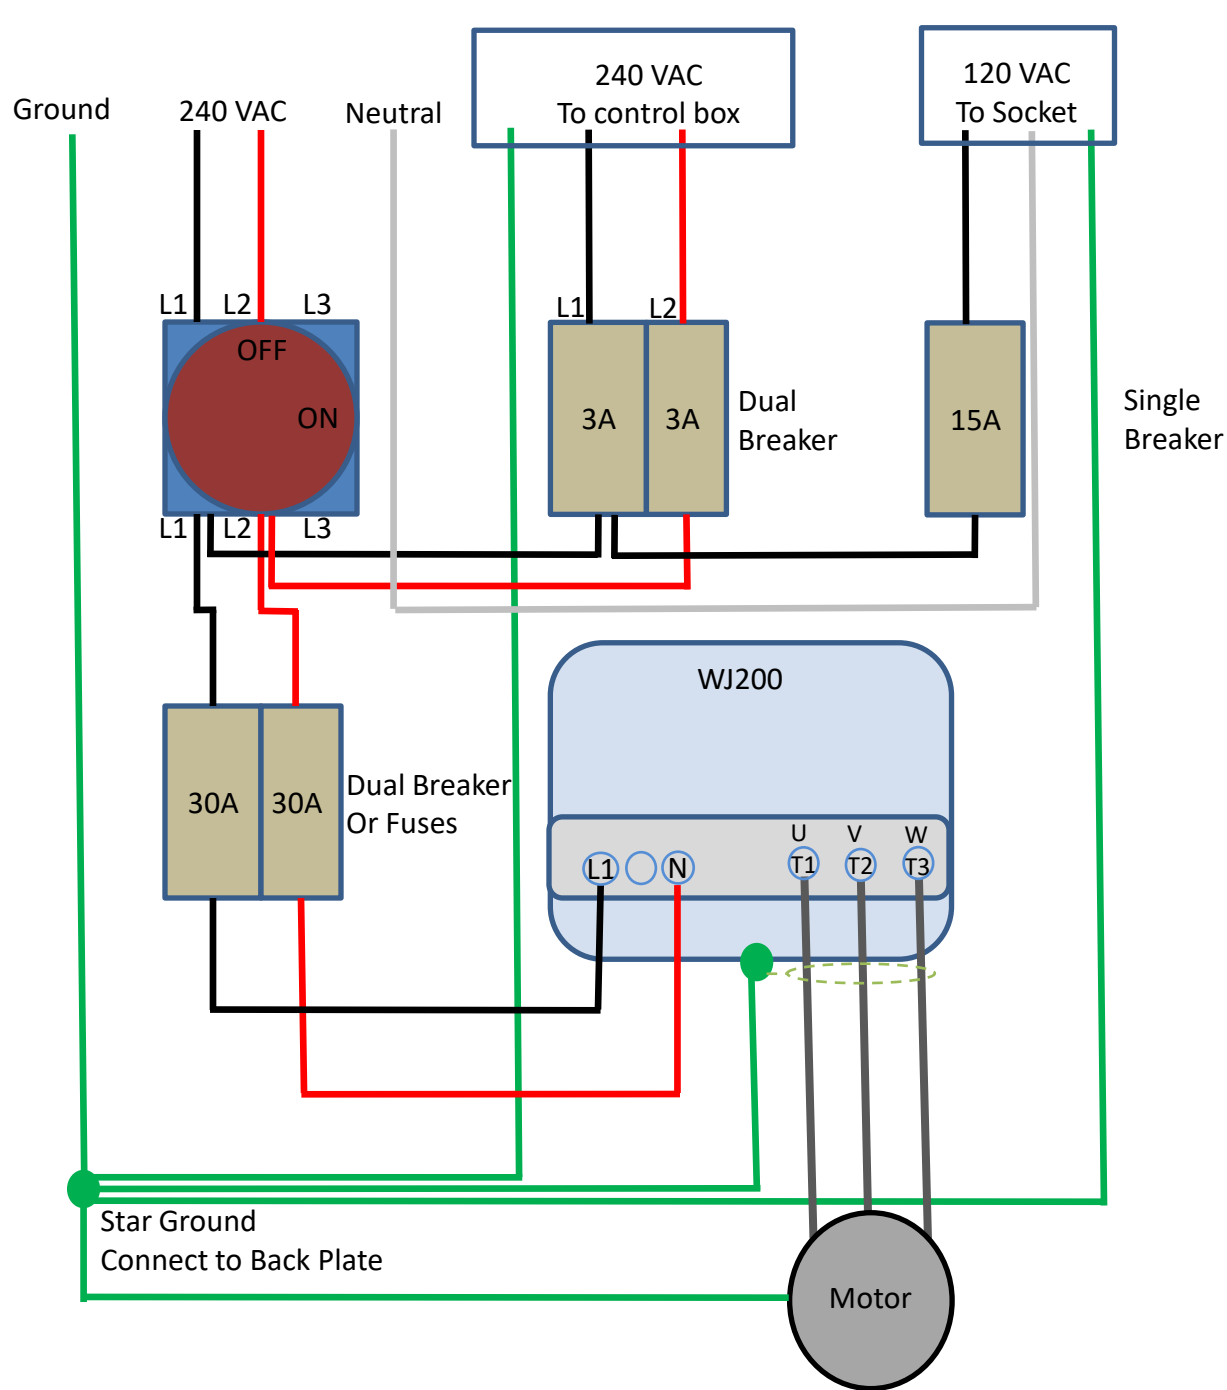

VFD Basic High Voltage
Disconnect with fusing
Control box/coolant 240VAC breaker
Single 120VAC socket with breaker
Single Phase 240VAC

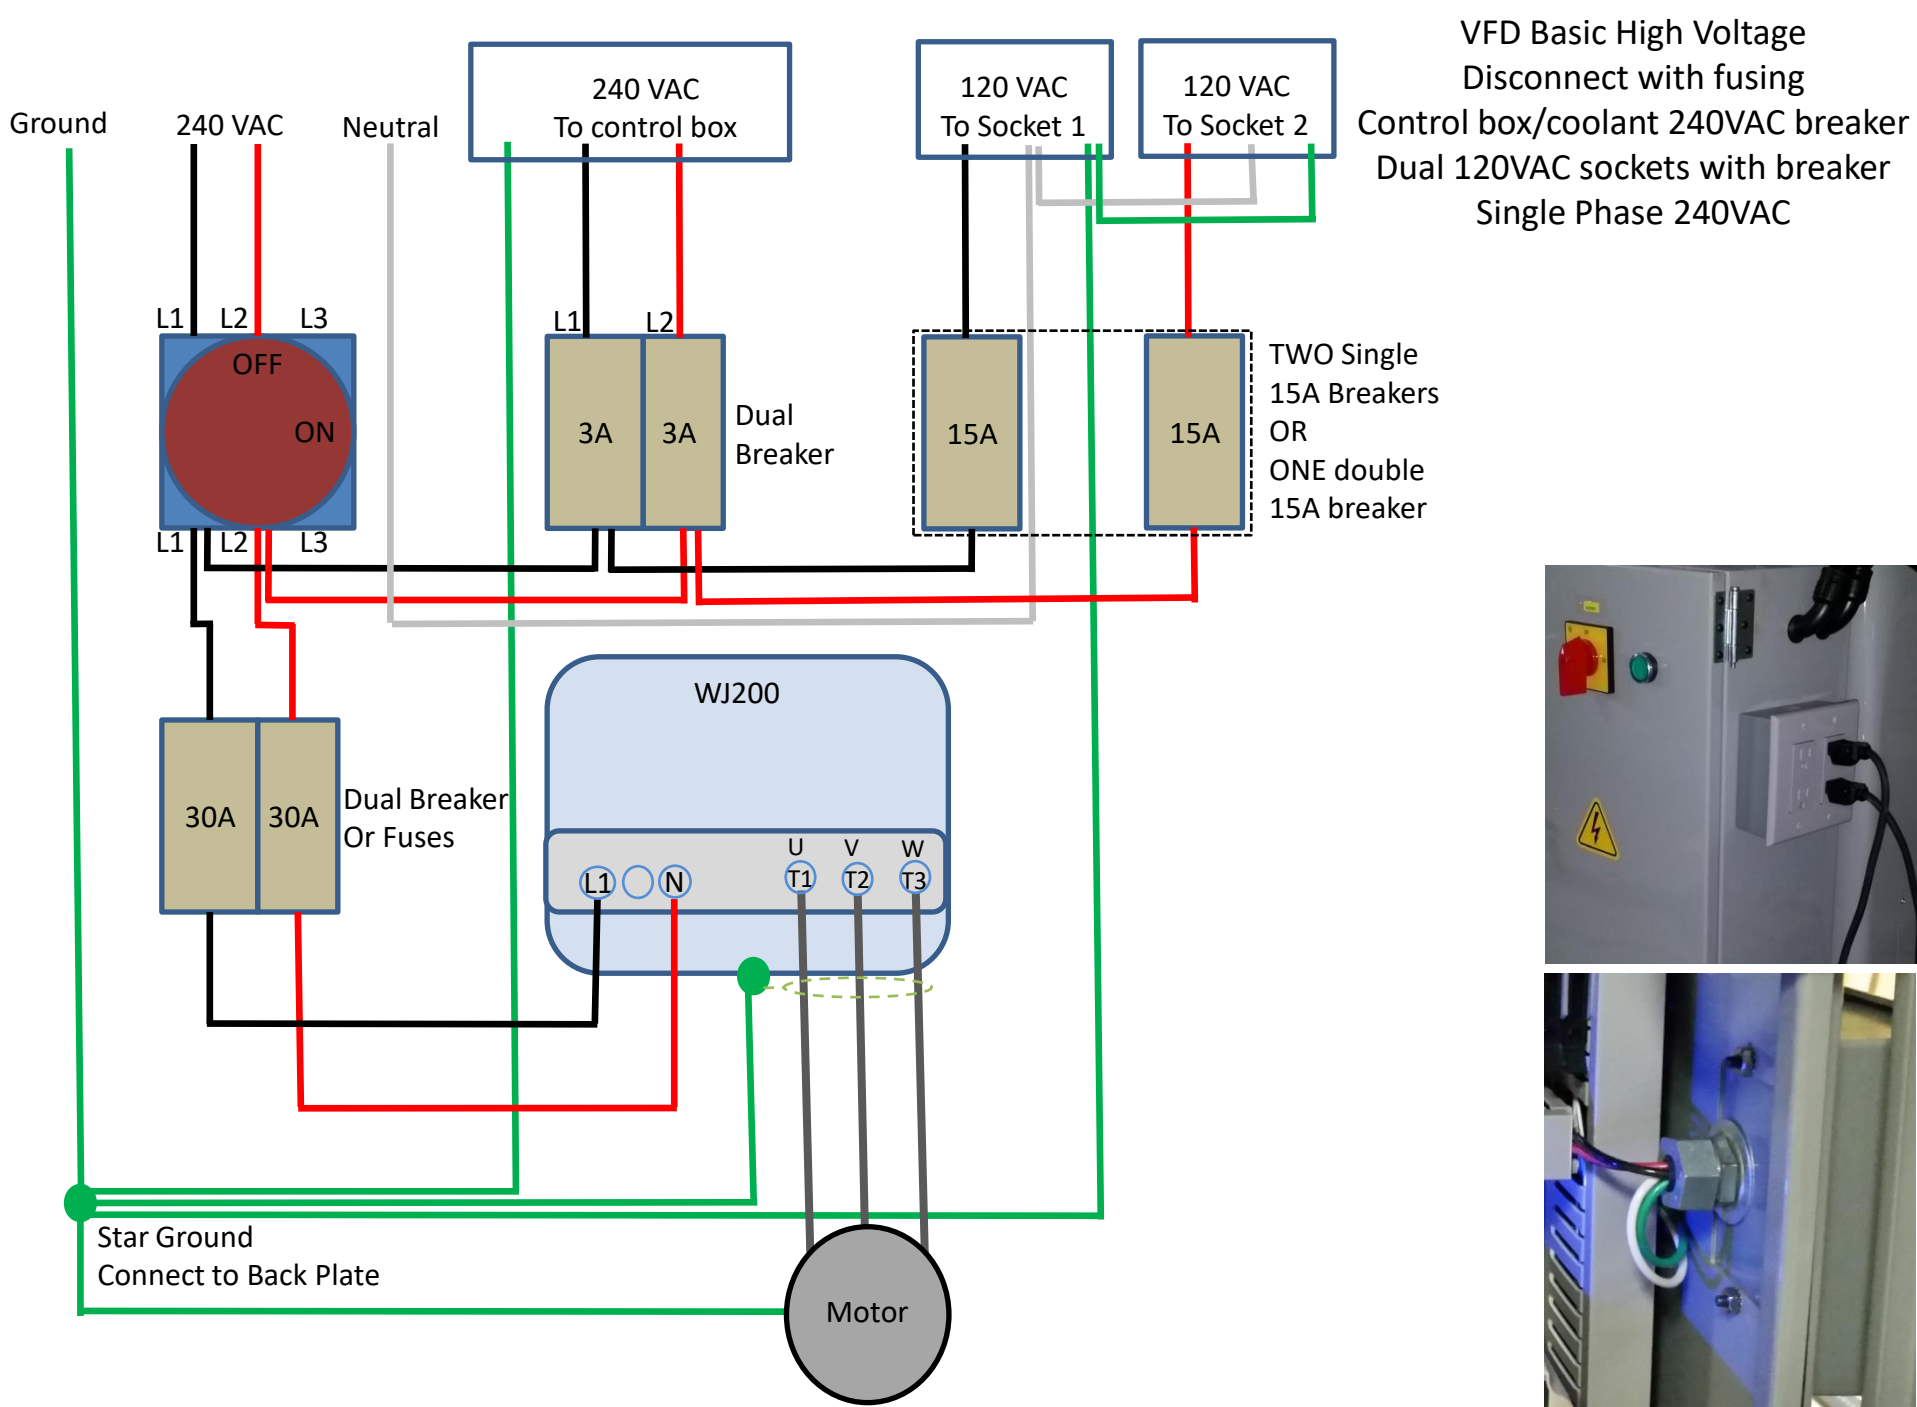

Single Phase VFD Enclosure 1.5-2.2 kW

Hubbell-Wiegmann enclosure, 14 x 12 x 8 inch with HW-MP1412CS back plate
Socomec SIRCO M Series disconnect switch, with extension & handle
Allen Bradley 1492-FB2J30 Fuse Holder 30A 600V Class-J 2-pole
JHL30-1 JHL high speed Class J drive 30A fuses #2
FAZ-C3-2 Eaton supplementary protector, 2-pole 3A (240VAC to system/coolant)
FAZ-C15-1-SP Eaton supplementary protector, 1 pole 15A (120VAC outlet)
KTS011 0-60°C Compact Mechanical Thermostat NO Temperature Controller
120mm 24VDC Fan with filters screens
500W 50ohm Aluminum shell braking resistor



Three Phase VFD Enclosure 3.7 kW

Enclosure, 16 x 14 x 8 inch with fabricated back plate
ABB 40A disconnect switch, with extension & handle
Ferraz Shawmut US3J3I Ultrasafe Fuse Holder 30A 600V Class-J 3-pole
JHL30-1 JHL high speed Class J drive 30A fuses #3
FAZ-C3-3 Eaton supplementary protector, 3-pole 3A (240VAC to system/coolant)
120mm 24VDC Fan with filters screens
500W 47ohm Aluminum shell braking resistor
Rhino 24VDC 100W auxiliary power supply for control system and fan

